

# Lincoln Avenue Parklet Public Art Project

Design Development Presentation


By Saori Ide and Jonathan Russell

# *Reflections*

Wind Sculpture

Concept drawing




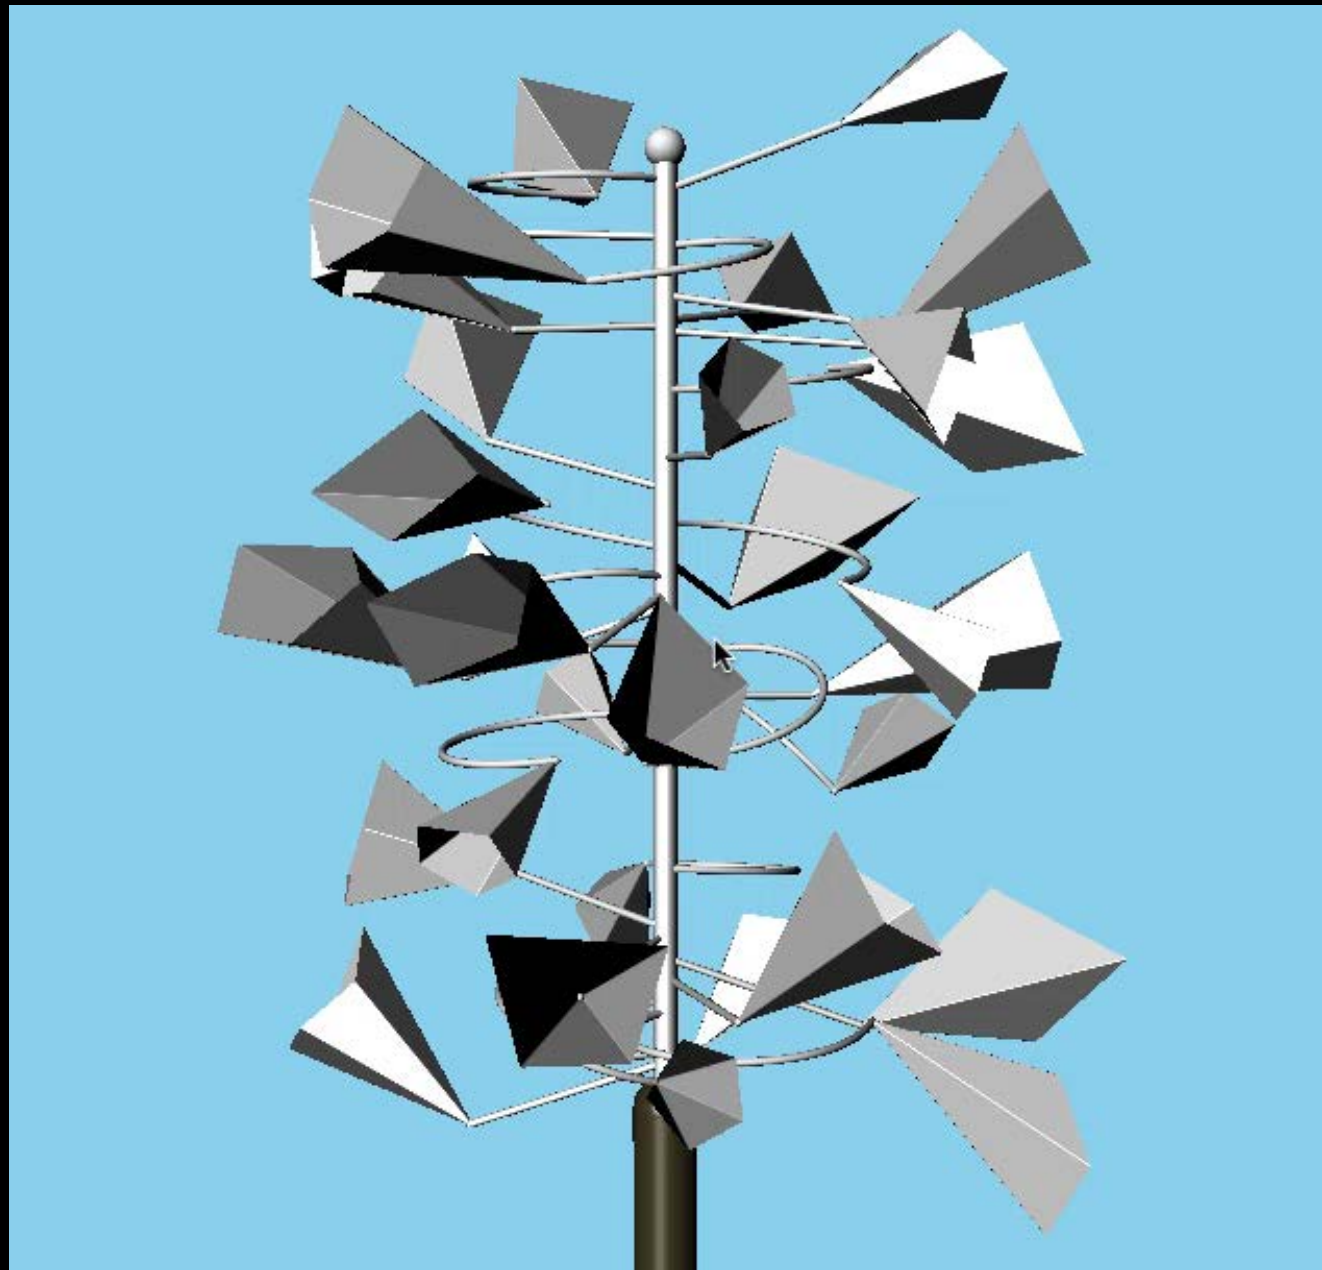

Close up

Click (→) to play

# Site Plan

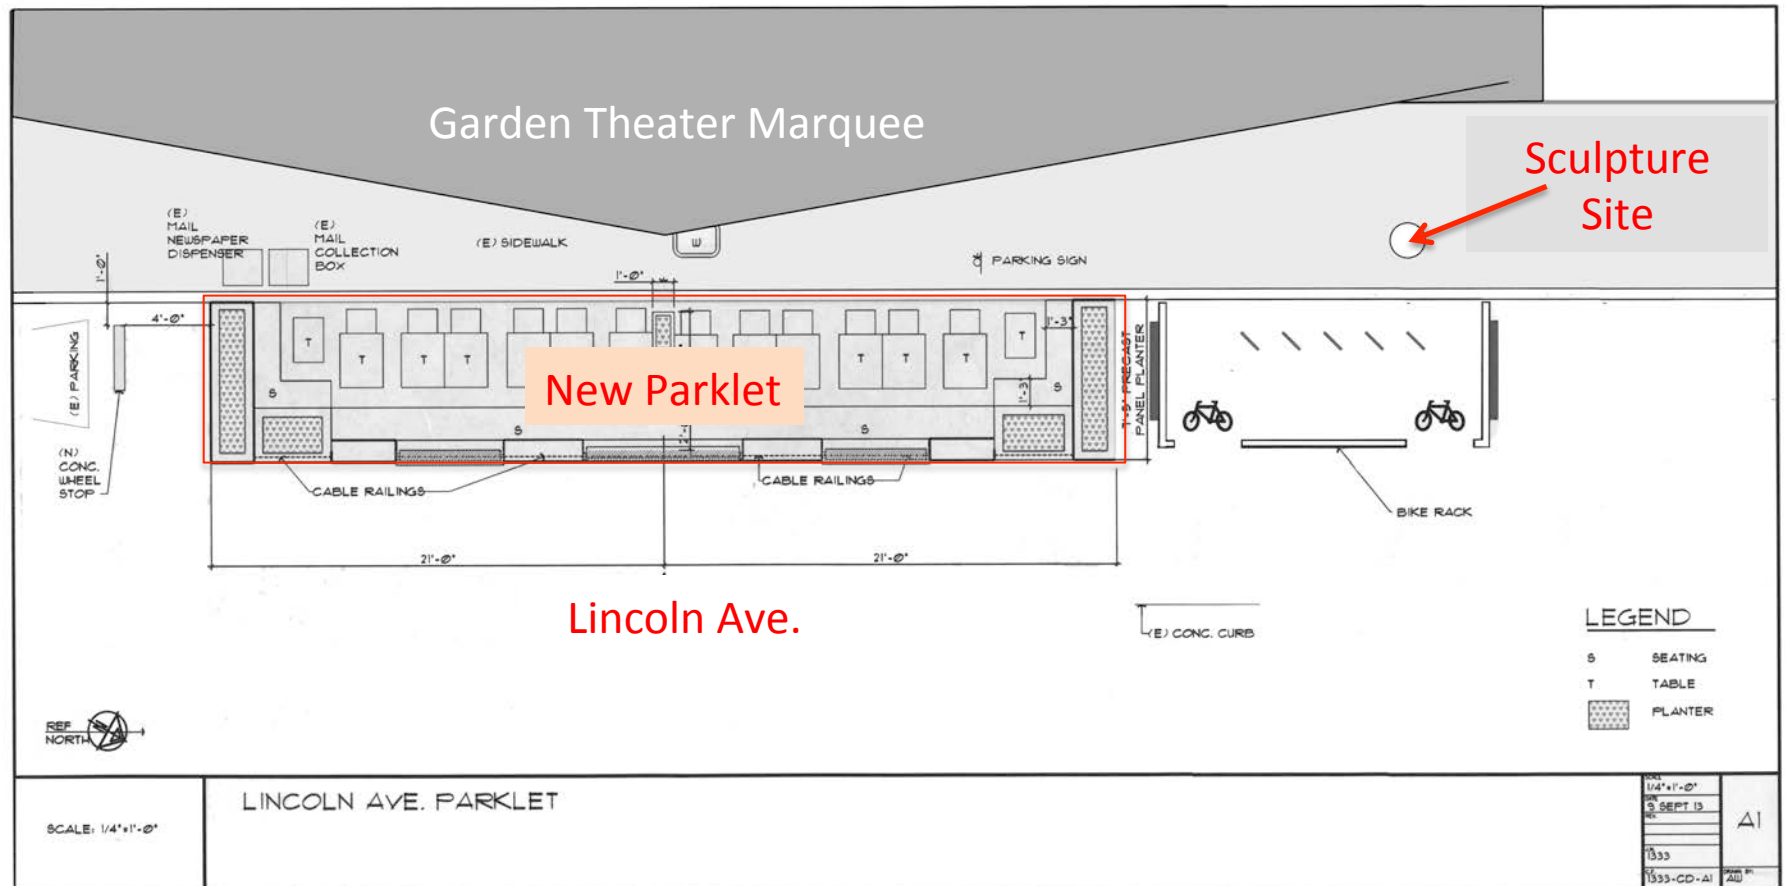



VISIT SANTA @ GARDEN THEATER THRU 12/22  
12/19 CELEBRATE HERE W/ KISS & MAKEUP @ 6  
CABLE CAR RIDES TO VIEW HOLIDAY LIGHTS  
ALL WG HOLIDAY INFO @ WILLOWGLEN.ORG  
WG LITTLE LEAGUE SIGNUPS @ WGLL.ORG

VISIT SANTA @ GARDEN THEATER THRU 12/22  
12/19 CELEBRATE HERE W/ KISS & MAKEUP @ 6  
CABLE CAR RIDES TO VIEW HOLIDAY LIGHTS  
ALL WG HOLIDAY INFO @ WILLOWGLEN.ORG  
WG LITTLE LEAGUE SIGNUPS @ WGLL.ORG

TODOWN CAFE

STUMPY'S STUMPY'S STUMPY'S STUMPY'S





# Aesthetic Considerations

- Placement
- Busy visual background
- Pedestrian & vehicle field of view
- Rather than a stand alone artwork, we want to utilize form, movement and light to create an interactive dialogue between the setting, the artwork and the viewer.



El Cerrito  
Wind Sculpture

Click (→) to play



El Cerrito  
Wind Sculpture

Click (→) to play






## Dimensions:

Height:

Approx. 16' 5"

Wight:

Approx. 150 lbs.

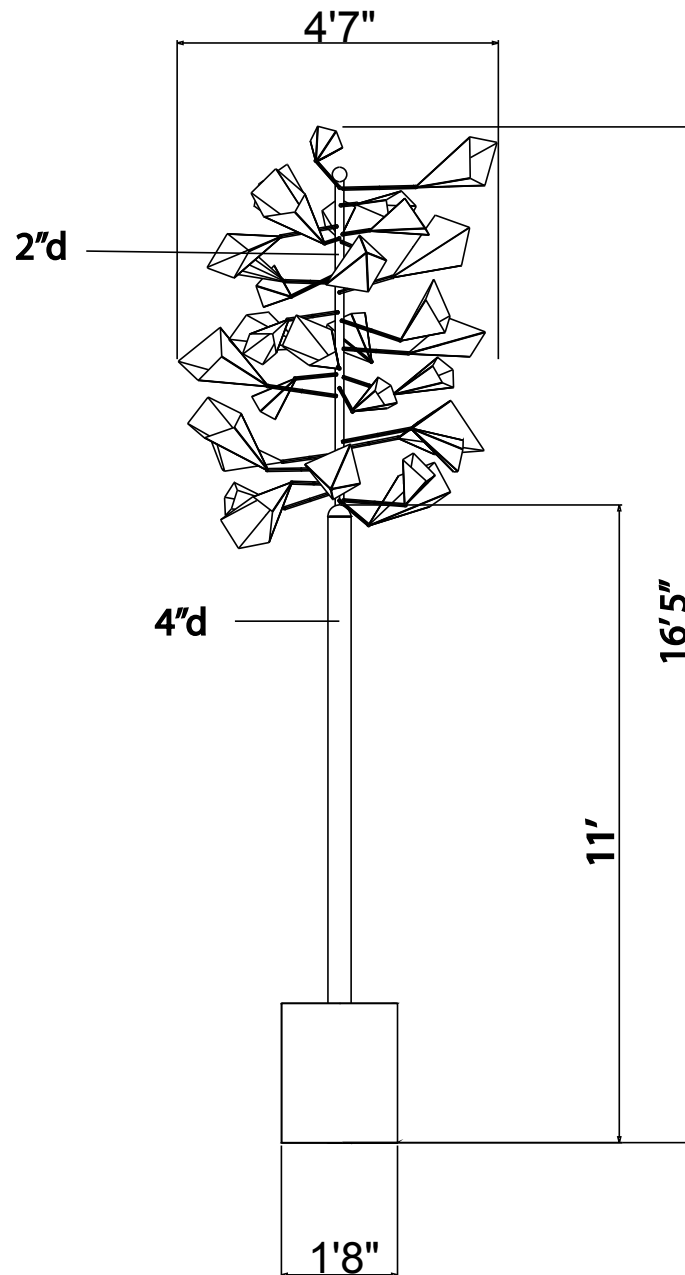





## Individual Form:

Qty.: 8

Qty.: 10


Qty.: 5

Qty.: 8

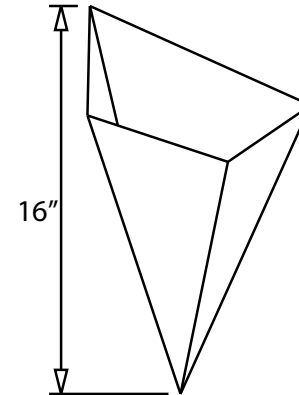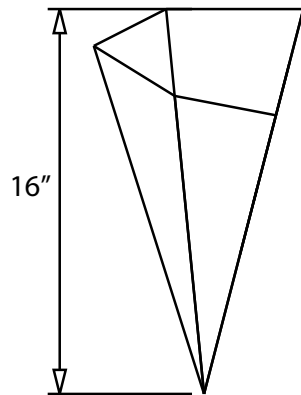



# Schematic Drawing:

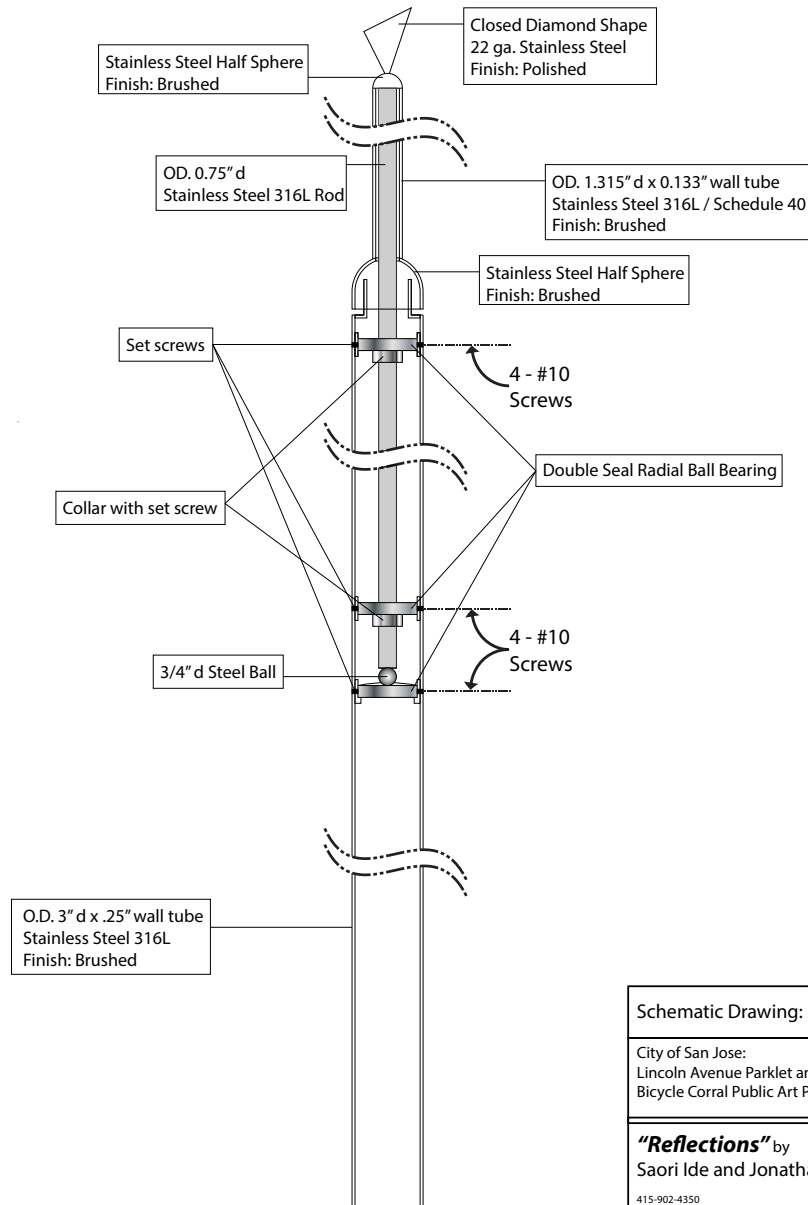

## Schematic Drawing: Materials

City of San Jose:  
Lincoln Avenue Parklet and  
Bicycle Corral Public Art Project

**"Reflections"** by  
Saori Ide and Jonathan Russell

415-902-4350  
www.rideartstudio.com

# Budget:

Ride Art, LLC  
jr@redmetalarts.com  
saori@srfineart.com  
415-902-4350

## San Jose Lincoln Ave. Public Art Project

8/20/14

### Detail Budget

Descriptions	Cost	Total
Materials		
Materials	5,700.00	
Consumable Supplies	350.00	
<b>Total Cost of Materials</b>		<b>6,050.00</b>
Contract Labor		
Waterjet cutting	800.00	
<b>Total Contract Labor</b>		<b>800.00</b>
Insurance		
Liability	420.00	
Auto	300.00	
<b>Total Insurance</b>		<b>720.00</b>
Fabrication		
Labor	6,950.00	
<b>Total Fabrication</b>		<b>6,950.00</b>
Site Preparation		
Footing & Demolition	3,000.00	
Re-paving	1,500.00	
Traffic Control	100.00	
Sidewalk Paving Design Work	450.00	
<b>Total Site Preparation</b>		<b>5,050.00</b>
Transportation		
Truck Rental	300.00	
Gas	50.00	
<b>Total Transportation</b>		<b>350.00</b>
Installation		
Equipment Rental	500.00	
Labor	800.00	
<b>Total Installation</b>		<b>1,300.00</b>
Overhead Expenses		
Studio Rent	1,200.00	
Utilities	450.00	
Office Expenses	130.00	
<b>Total Overhead Expenses</b>		<b>1,780.00</b>
<b>Contingency</b>		<b>2,500.00</b>
<b>Total:</b>		<b>25,500.00</b>

## Materials:

Jewel-like shape -----Stainless Steel  
Connectors ----- Stainless Steel  
Upper pole ----- Stainless Steel  
Lower pole ----- Steel  
Base ----- Concrete / embedded SS elements

## Surface Finish:

Stainless Steel ----- Satin polish  
Steel Pole ----- Primed and painted (Color: TBD)  
Concrete Base ----- dark(er) stain with SS polished elements

## Maintenance:

- Stainless Steel will be clear coated for surface integrity
- Bearings will be covered and protected from weather
- Base pole epoxy painted

## Protection against Theft and Vandalism:

- The sculpture will be mounted 11 feet above the ground

# Footing:

